


STYLE 568C AND 580C, 70 DURO BUNA-N O-RING CORD



SEAL INFORMATION	
MATERIAL	BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PRESSURE RANGE	VARIABLES ACCORDING TO DIAMETRICAL CLEARANCE
PART NUMBER	(Prefix) - (Cord) - (Nominal)

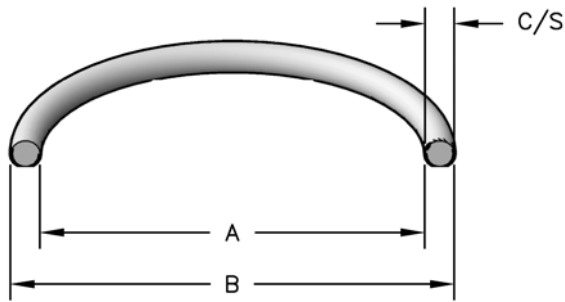

SOLD BY FOOT

Part Number	Nom. Cross Section	C HEIGHT	CROSS SECTION	List Price
568C-062	1/16		.070 ±.006	\$0.62
568C-093	3/32		.103 ±.007	0.75
568C-125	1/8		.139 ±.007	0.85
568C-187	3/16		.210 ±.008	1.08
568C-250	1/4		.275 ±.008	1.26
568C-313	5/16		.313 ±.012	1.76
568C-375	3/8		.375 ±.012	2.76
568C-437	7/16		.437 ±.012	2.48
568C-500	1/2		.500 ±.012	3.42
580C-093	3/32	.099 ±.005	.099 ±.005	0.84
580C-125	1/8	.134 ±.006	.134 ±.006	1.05
580C-187	3/16	.203 ±.007	.203 ±.007	1.29
580C-250	1/4	.266 ±.007	.266 ±.007	1.56

METRIC O-RING CORD STOCK

Part Number	List Price
MORC-1.5	\$0.83
MORC-2.0	0.88
MORC-2.5	1.08
MORC-3.0	1.42
MORC-4.0	1.52
MORC-5.0	2.31
MORC-5.7	2.67
MORC-6.0	2.35
MORC-8.4	3.49